



10°-12° MOVING WALK CONSTRUCTION PARAMETER

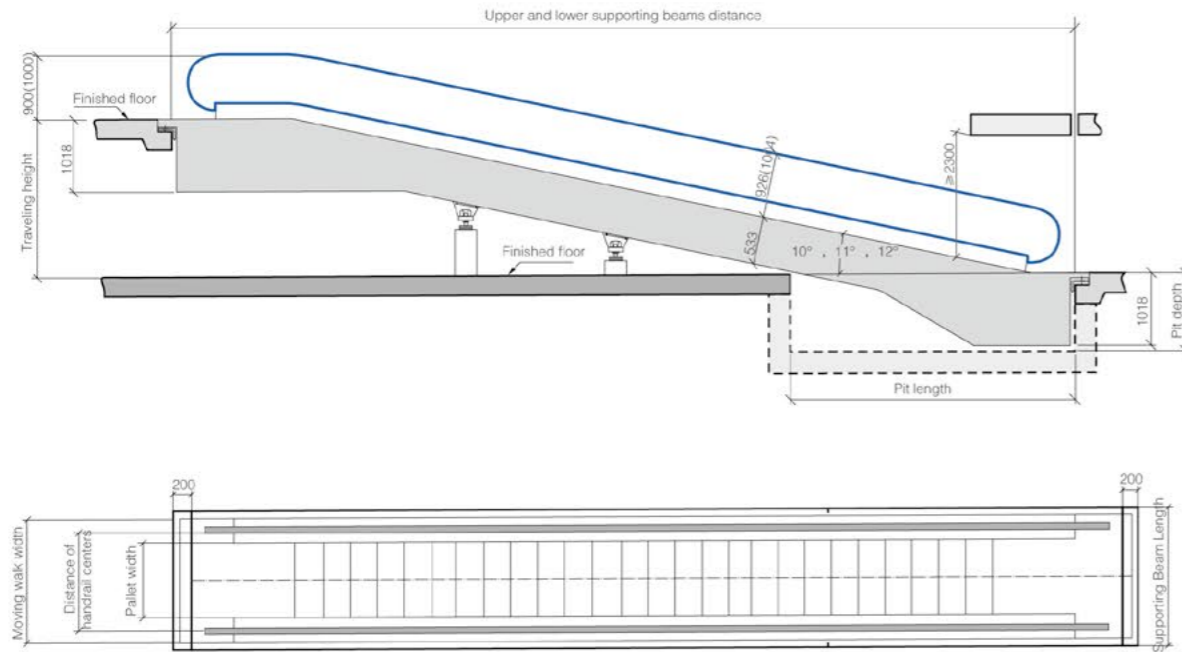

Model	Rise (mm)	Rated speed (m/s)	Capacity (per./h)	Inclination (°)	Motor power (Kw)	A (mm)	B (mm)	C (mm)	D (mm)
TR (800/10°)	2000 ≤ H ≤ 4200	0.5	6750	10	8	800	1038	1400	≥ 1460
	4200 < H ≤ 5900				11				
	5900 < H ≤ 6500				15				
TR (1000/10°)	2000 ≤ H ≤ 3300	0.5	9000	10	8	1000	1238	1600	≥ 1660
	3300 < H ≤ 4600				11				
	4600 < H ≤ 6200				15				
	6200 < H ≤ 6500				2 × 11				
TR (800/11°)	2000 ≤ H ≤ 4300	0.5	6750	11	8	800	1038	1400	≥ 1460
	4300 < H ≤ 6000				11				
	6000 < H ≤ 6500				15				
TR (1000/11°)	2000 ≤ H ≤ 3400	0.5	9000	11	8	1000	1238	1600	≥ 1660
	3400 < H ≤ 4700				11				
	4700 < H ≤ 6400				15				
	6400 < H ≤ 6500				2 × 11				
TR (800/12°)	2000 ≤ H ≤ 4500	0.5	6750	12	8	800	1038	1400	≥ 1460
	4500 < H ≤ 6200				11				
	6200 < H ≤ 6500				15				
TR (1000/12°)	2000 ≤ H ≤ 3500	0.5	9000	12	8	1000	1238	1600	≥ 1660
	3500 < H ≤ 4900				11				
	4900 < H ≤ 6500				15				

0°-6° MOVING WALK CONSTRUCTION PARAMETER

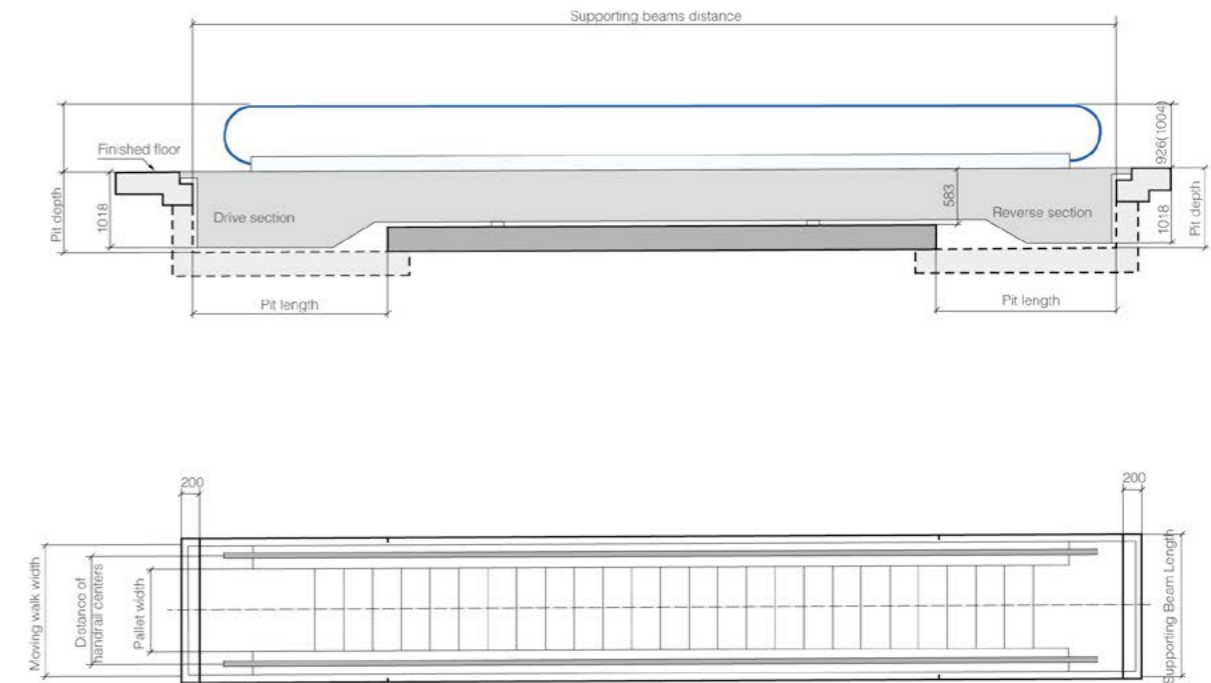

Model	Length (mm)	Rated speed (m/s)	Capacity (per./h)	Inclination (°)	Motor power (Kw)	A (mm)	B (mm)	C (mm)	D (mm)
TR (800/0°-6°)	10000 ≤ L ≤ 80000	0.5	6750	0-6	8	800	1038	1400	≥ 1460
	80000 < L ≤ 110000				11				
TR (1000/0°-6°)	10000 ≤ L ≤ 70000	0.5	9000	0-6	8	1000	1238	1600	≥ 1660
	70000 < L ≤ 110000				11				